

RIDGE VENTILATION

**TYPAR**<sup>®</sup>   
**Flashing** FLEX

A Fiberweb Brand

**TYPAR**<sup>®</sup>   
**Flashing** PEEL & STICK

A Fiberweb Brand

**TYPAR**<sup>®</sup>   
**Flashing** RA™

A Fiberweb Brand

**TYPAR**<sup>®</sup>   
**Tape**


A Fiberweb Brand



Part of the **Typar**<sup>®</sup> Weather Protection System

## Finish smart with Typar® Accessories.

Before you install the windows or siding, assure a tight building envelope by sealing cracks and seams and installing flashing around rough openings. Typar offers all the accessories you need to do the job right as part of the complete Typar® Weather Protection System.

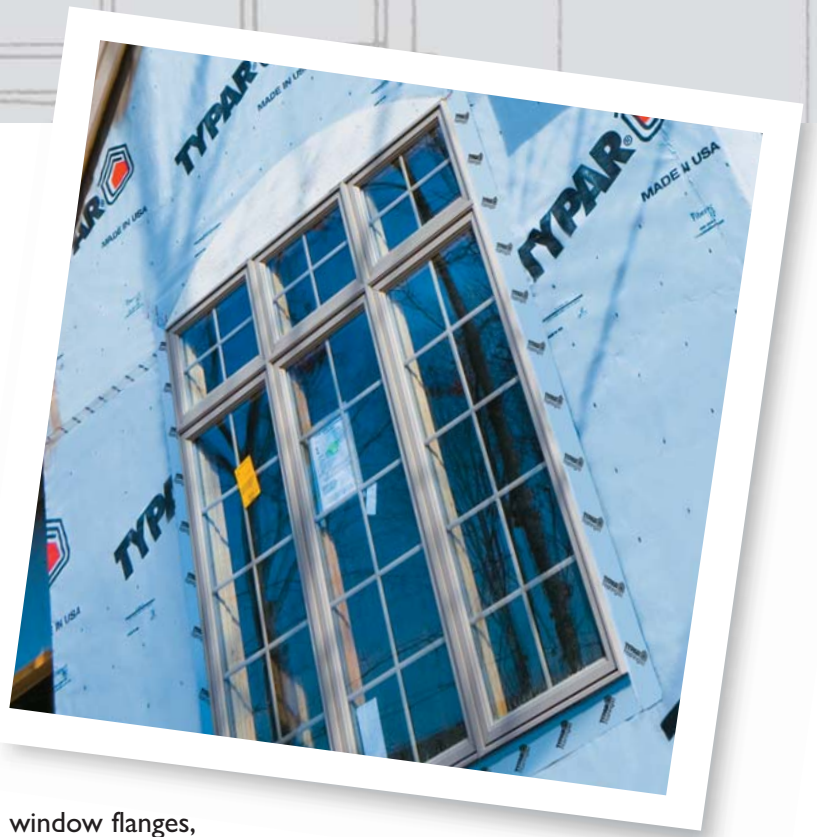


### Typar® Flashing Flex

A conformable flexible, composite peel and stick flashing product, ideal to flash around arched windows. Use it on window flanges, sill plates, corners and joints to improve air and moisture holdout. Based on a two-ply oriented high-density polyethylene film, mated to a premium butyl rubber adhesive and release sheet.



### Typar® Peel & Stick Window Flashing

This modified bloc co-polymer flashing is based on Typar's proven weather-resistant barrier and sealant technology, compatible with Typar® HouseWrap and Construction Tape. Features Quik-Peel™ split back release paper for easy positioning and flexible installation.



### Typar® Flashing RA™

Its peel and stick backing provides exceptional adhesion and makes this flashing easy to handle and install. Flashing RA is perfect for vertical and non-roofing horizontal applications such as windows, doors, wall penetrations and other fenestrations.




### Typar® Construction Tape

A strong, coated polypropylene film that seals seams and edges to ensure the integrity of the building envelope. Use it on window flanges, corners, joints and seams to improve the building envelope and air and moisture holdout. Also to repair rips, punctures and tears. Won't deteriorate over time, providing years of reliable performance.

Weather Protection System	TYPAR® Flashing		
	RA	PEEL & STICK	FLEX
Broad Service Temperature Capability	●	●	●
Excellent Initial Tack	●	●	●
Nail Sealable	●	●	●
Superior In-Kind Performance	●	●	●
Excellent Value vs. Competition	●	●	●
10-Year Limited System Warranty	●	●	●
Installs Easily & Cleanly		●	●
Repositionable			●
Conformable (for arches, jambs & sills)			●

## Part of the Typar Weather Protection System.

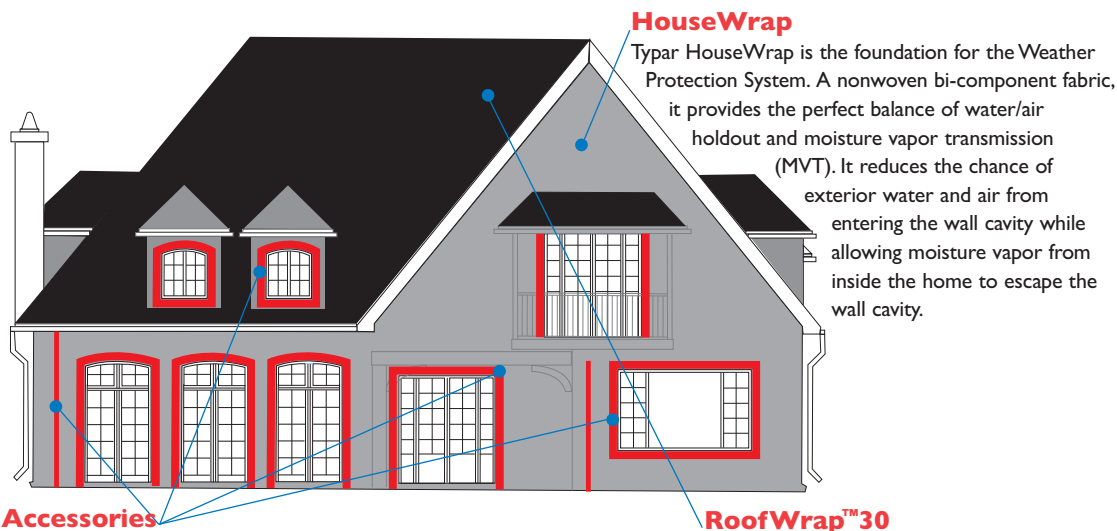

### HouseWrap

Typar HouseWrap is the foundation for the Weather Protection System. A nonwoven bi-component fabric, it provides the perfect balance of water/air holdout and moisture vapor transmission (MVT). It reduces the chance of exterior water and air from entering the wall cavity while allowing moisture vapor from inside the home to escape the wall cavity.

### Accessories

Typar offers three flashing options to ensure seal integrity around doors, windows and other exterior rough openings. Typar Flashing RA offers affordable, best-in-class performance. Typar Peel & Stick Flashing with Quik-Peel™ Technology is our proprietary modified bloc co-polymer flashing. Typar Flashing Flex is butyl-based and is perfect for sealing around arched windows. Typar Construction Tape is a strong, polypropylene film, coated with a powerful all-weather acrylic adhesive that seals out the elements.

### RoofWrap™30

Typar RoofWrap 30 is a high strength polypropylene underlayment. It's a tough, weather-resistant fabric, engineered to protect the roof under the harshest conditions. It's the ideal choice under shingles, shakes, tiles, slate and metal roofs, and resists tearing away even in high winds.

#### FLASHING FLEX TYPICAL CHARACTERISTICS

Adhesive	Butyl Rubber
Recommended Exposure Limit	90 Days
Low Temperature Flexibility (per ASTM D-903)	PASS
Nail Sealability (per ASTM D-1970)	PASS
Tensile Strength (per ASTM D-2523)	PASS

ROLL SIZES: 6 in. x 75 ft. and 9 in. x 75 ft.

#### PEEL & STICK FLASHING TYPICAL CHARACTERISTICS

Adhesive	Modified bloc co-polymer
Recommended Exposure Limit	180 Days
Low Temperature Flexibility (per ASTM D-903)	PASS
Nail Sealability (per ASTM D-1970)	PASS
Tensile Strength (per ASTM D-2523)	PASS

ROLL SIZES: 4 in. x 75 ft., 6 in. x 75 ft., 9 in. x 75 ft. and 12 in. x 75ft.

#### FLASHING RA

##### TYPICAL CHARACTERISTICS

Adhesive	Rubberized Asphalt
Recommended Exposure Limit	90 Days
Low Temperature Flexibility (per ASTM D-903)	PASS
Nail Sealability (per ASTM D-1970)	PASS
Tensile Strength (per ASTM D-882)	11.6 lbs./in.

ROLL SIZES: 4 in. x 75 ft., 6 in. x 75 ft., 9 in. x 75 ft. and 12 in. x 75 ft.

#### CONSTRUCTION TAPE

##### TYPICAL CHARACTERISTICS

Roll Dimensions	55 yards x 1 7/8" 16 rolls per carton
Peel Adhesion (PSTC*-1) Typar Stainless steel	Immediate: 35 oz./in. 75 oz./in.
Tensile Strength (PSTC-31)	20 lbs./in.
Elongation	136%
Temperature Resistance: Minimum Application Temperature Maximum use temperature	0° F (-18° C) 230° F (110° C)

\* Pressure Sensitive Tape Council



## FOR COMMERCIAL & RESIDENTIAL APPLICATIONS

### SPECIFICATIONS:

#### PART 1 - GENERAL

- 1.1 Section Includes
  - A. Self-adhering Flashing (Tymar Peel & Stick Flashing with Quik-Peel™, Tymar Flashing Flex and Tymar Flashing RA).
  - B. Primers.
  - C. Fasteners.
- 1.2 References
  - A. ASTM International
    1. ASTM D-903, Standard Test Method for Peel or Stripping Strength of adhesive bonds.
    2. ASTM D-2523, Standard practice for Twisting Load-Strain Properties.
    3. ASTM D-1970, Standard Specification for Self-Adhesion polymer modified bituminous sheet materials.
- 1.3 Submittals:
  - A. Product Data: Submit manufacturer current technical literature for each type of product.
  - B. Submit copies of test results showing performance characteristics equaling or exceeding those specified.
- 1.4 Quality Assurance
  - A. Qualifications
    1. Installer shall have documented successful experience with installation of TYPAR Flashing products.
    2. Installation shall be in accordance with manufacturer's installation guidelines and recommendations.

*For more information, call 800-284-2780  
or visit [www.typar.com](http://www.typar.com).*

The information contained herein is to the best of our knowledge accurate and reliable and is provided for the user's assessment and verification. However, since the circumstances and conditions under which such information and the products discussed can be used may vary and are beyond our control, we make no warranty, expressed or implied, of merchantability, fitness or otherwise, or of the results to be obtained, or against patent infringement, and we disclaim all liability from any resulting damage or loss.

### SPECIFICATIONS CONTINUED:

- 1.5 Delivery, Storage and Handling
  - A. Deliver flashing materials in manufacturer's original, unopened, undamaged containers with identification labels intact.
  - B. Store flashing material as recommended by manufacturer.
- 1.6 Project Conditions
  - A. Do not apply flashing on wet or damp surface.
  - B. Apply to surfaces free of oils, dirt, and other debris.
  - C. Apply primer before installation as recommended by manufacturer.
  - D. Install flashing materials above 40° F.

#### PART 2 - PRODUCTS

- 2.1 Manufacturer
  - A. Fiberweb, 70 Old Hickory Blvd, Old Hickory, TN 37138; 800-284-2780; [www.typar.com](http://www.typar.com).
- 2.2 Materials
  - A. Self-adhering Flashing Peel & Stick with Quik-Peel™
    - a. Description
      - i. Face material composition: smooth polyolefin barrier.
      - ii. Face color: gray.
      - iii. Adhesive composition: modified bloc co-polymer adhesive.
      - iv. Thickness: 15mil.
      - v. Release liner: siliconized paper.
      - vi. Dimensions: 4 in. x 75 ft., 6 in. x 75 ft., 9 in. x 75 ft., 12 in. x 75 ft.
  - B. Self-adhering Flashing Flex
    - a. Description
      - i. Face material composition: conformable textured polyolefin.
      - ii. Face color: dark gray.
      - iii. Adhesive composition: butyl adhesive.
      - iv. Thickness: 60mil.
      - v. Release liner: siliconized paper.
      - vi. Dimensions: 6 in. x 75 ft., 9 in. x 75 ft.
  - C. Self-adhering Flashing RA
    - a. Description
      - i. Face material composition: smooth polyolefin film.
      - ii. Face color: gray.
      - iii. Adhesive composition: rubberized asphalt.
      - iv. Thickness: 25mil.
      - v. Release liner: siliconized paper.
      - vi. Dimensions: 4 in., 6 in., 9 in., 12 in. x 75 ft.
  - D. Performance characterizations
    - a. Low temp Flex ASTM D-903 PASS.
    - b. Nail sealability ASTM D-1970 PASS.
    - c. Tensile strength ASTM D-2523 PASS.
- 2.3 Accessories
  - A. Primer: Use 3M™ Super77™ or equal.
  - B. Seam tape: Tymar construction tape.
  - C. Fastener: Fastener is dependent on substrate construction.
  - D. Sealant: Must comply with ASTM C920 elastomeric polymer sealant.

#### PART 3 - EXECUTION

- 3.1 Examination
  - A. Verify substrate and surface conditions are in accordance with the flashing manufacturer's recommendation. NOTE - Flashing manufacturer recommends weather barrier be installed prior to the installation of the windows.
- 3.2 Installation
  - A. Follow the Tymar flashing installation procedures.
- 3.3 Protection
  - A. Protect installed flashing from damage during construction.

3M™ Super 77™ is a registered trademark of 3M Corporation.



**Smart system backed by a 10-year limited warranty.**



© 2008 Fiberweb, Inc.

Fiberweb, Inc.  
70 Old Hickory Blvd.  
Old Hickory, TN 37138 USA  
1-800-284-2780 • Fax: 615-847-7068  
[www.typar.com](http://www.typar.com)

Tymar®, Tymar® Weather Protection System, Tymar® HouseWrap, Tymar® Peel & Stick Flashing, Tymar® Flashing Flex and Tymar® Construction Tape are registered trademarks of Fiberweb, Inc.

Tymar® RoofWrap™ 30, Tymar® MetroWrap™, Tymar® StormWrap, Tymar Flashing RA™ and Quik-Peel™ are trademarks of Fiberweb, Inc.

3M™ Super 77™ is a registered trademark of 3M Corporation.